
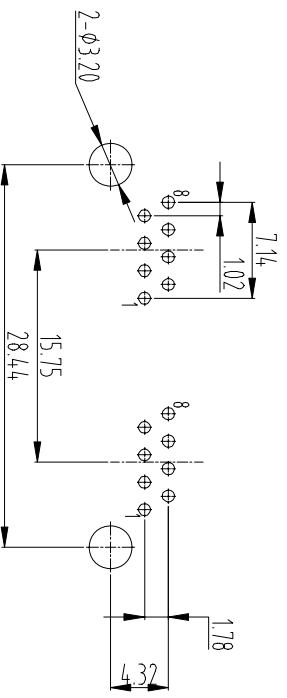
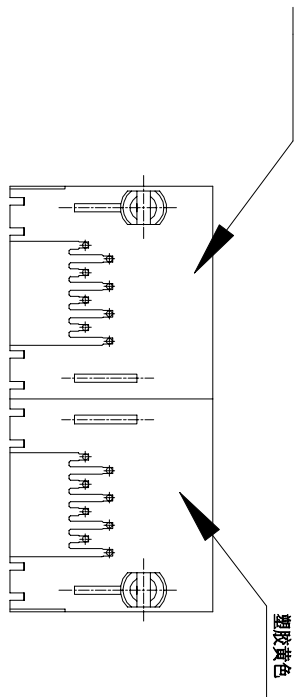


CATEGORY	DESCRIPTION	P/N #
CONNECTOR	RJ45 1X2 8P8C全塑无灯拼接式	MU5688P-FX12-HXRDRY

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01		New Release	KELLY	2017.11.03

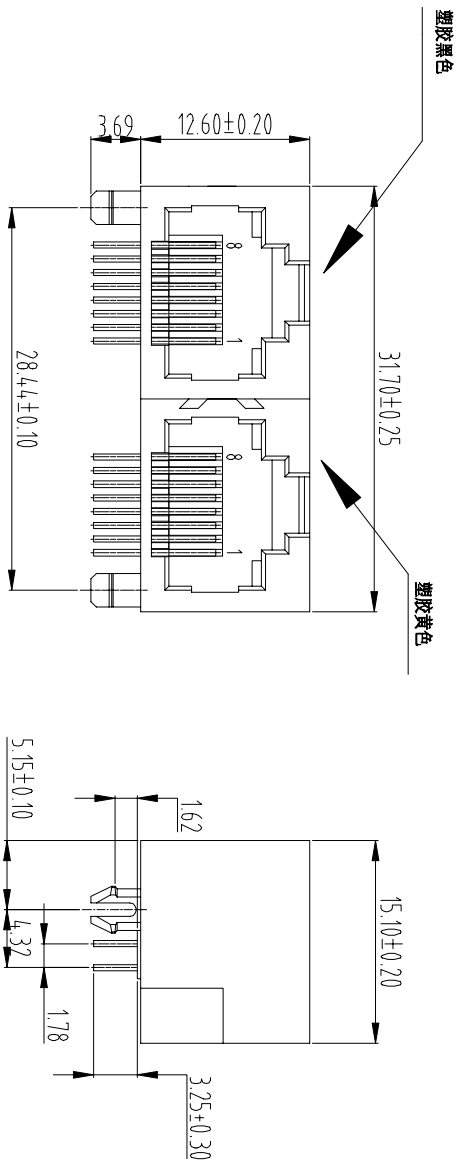

PCB LAYOUT/TOP VIEW

NOTES:
1.HOUSING (ROUND PIN Ø0.46mm)
2.CONTACT (PHOSPHOR BRONZE WITH GOLD PLATING OVER NICKEL).

ELECTRICAL:
1.VOLTAGE RATING :125V AC
2.CURRENT RATING :15AMP
3.CONTACT RESISTANCE :30 MILLIOHMS MAX.
4.INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC
5.DIELECTRIC WITHSTANDING VOLTAGE :1000V AC RMS 50Hz OR 60Hz, 1MIN.

MECHANICAL:
1.INSETION FORCE :2.2kg MAX.
2.RETENTION STRENGTH :1.7kg BETWEEN JACK AND PLUG
3.DURABILITY :750 CYCLES MIN.

ENVIRONMENTAL:
1.STORAGE : -40°~+85°
2.OPERATION : -40° TO 85°

THE MATE'S MODULAR PLUG CONFORMING TO FCC PART68

MU5688P-FX12-HXRDRY
TABLE 1

X	Terminal Plating
0	Au G/F Plating
B	Au 1.8u" Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating

X	塑胶材料
P	PBT
4	PA46

UNLESS OTHERWISE SPECIFIED TOLERANCES		SCALE:1/1	UNIT: mm	DWG.NO:	
DECIMALS:	ANGLES:	APPROVED BY	CHECKED BY	PREPARED BY	
X : ±0.5	X : ±2°	DICK	XSY	XSY	
X.X : ±0.3	X.X : ±1'	CUSTOMER COPY			
X.XX : ±0.2					

東莞市合陵電子有限公司
DongGuan Heling Electronic Co.,LTD

1 2 3 4

1 2 3 4